


The luminaire is available in 4 versions- ZOT 12, a 1200 watt tungsten, ZOT 5HPi, a 575 watt arc, ZOT 7HPi, a 700 watt arc and ZOT 15, a 1500 watt arc. (ballast internally selectable from 1.2K-1.5K) Spot diameter shall be controlled via a rear handle iris control linked to a nichrome steel iris. The unit shall include an external fine focus control, top operated fader and a top mounted 5- color, push-pull boomerang. A resiliently mounted, dichroic glass reflector and optical quality glass lenses shall complete the optical system. Lamping shall be through a rear door using a 1/4 turn latch. Units requiring the removal of screws or requiring handling of the glass parts of the lamp shall not be acceptable. Lamping utilizes a "bayonet" style lamp/socket combination. The lamp is inserted through the socket and with a slight twist, locks in place. The ZOT, 5HPi, 7HPi, 12, shall have self-contained power supplies with an ON/OFF switch. ZOT 5 & 7 also include a circuit breaker. An 11 foot line cord, terminated in a NEMA 5-15P connector is also supplied. The ZOT 15 shall have an external power supply connected to the spotlight head via a 6 foot flexible cord terminated in a head mounted twist- lock type connector. The ON/ OFF switch and circuit breaker shall be power supply mounted. The external power supply shall have a 10 foot line cord terminated in a NEMA 5-15P connector. A three legged fixed base will be standard. Units shall be cooled by low volume (70 cfm maximum) muffin fans. Units using high volume fans shall not be acceptable. Housing shall be constructed of extruded aluminum and cold rolled steel and be powder coated using black and gold powder. Unit heads (all units) shall measure 42-1/2" long x 15" wide and 13" high including all controls.

LYCIAN STAGE LIGHTING, ZOT 5, ZOT 7, ZOT 12, ZOT 12HP shall be specified. Units are manufactured in the United States of America

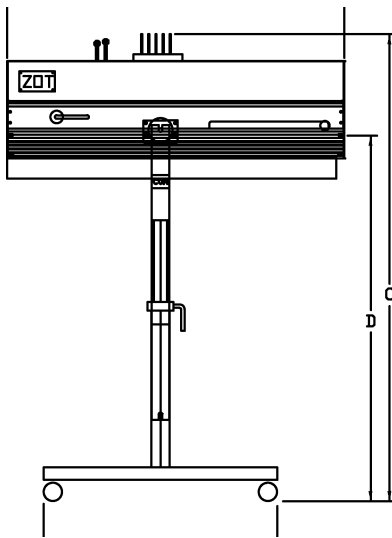

- A. Head Length- 42-1/4"
- B. Head Height- 13"
- C. Overall Height with Base- 46-1/2"

* Additional upward height adjustment 13"

*D. Height of Pivot- 39-3/4"

E. Base Width- 40"

Maximun Width of Head- 14"

PHOTOMETRICS

7-19 °

Distance	30 ft.	60ft	80 ft.	100 ft.	125 ft
Distance	9 meters	18 meters	25 meters	30 meters	38 meters
Spot Dia. Feet	3' 8"	7' 3"	9' 6"	12'	15'
Spot Dia. Meters	1.14	2.2	2.9	3.7	4.6
Flood Dia. Feet	10	19' 6"	26	32	40
Flood Dia. Meters	3	5.9	7.9	9.8	12.2

ZOT 12

FC Spot	708	177	100	64	41
Lux Spot	7621	1905	1076	689	441
FC Flood	653	120	92	59	38
Lux Flood	7029	1292	990	635	409

ZOT 5

FC Spot	1241	309	174	111	71
Lux Spot	13,347	3326	1873	1195	764
FC Flood	208	52	29		
Lux Flood	2239	560	312		

ZOT 7

FC Spot	2000	499	281	180	115
Lux Spot	16,404	4101	3025	1938	1238
FC Flood	306	76	43		
Lux Flood	3294	818	463		

ZOT 15

FC Spot	3140	785	442	283	181
Lux Spot	33,799	8450	4758	2530	1625
FC Flood	544	136	77	49	31
Lux Flood	5856	1464	829	527	334

ORDER CODE

- : 1200W Tungsten Followspot
- : 575W ARC Followspot
- : 700W ARC Followspot
- : 1200W ARC Followspot
- Tripod (Optional Substitute for Fixed Base)

Followspots inc. Head, Yoke, & Base

Specifications subject to change



LYCIAN
STAGE LIGHTING

PO Box 214, 1144 Kings Highway
Sugar Loaf, NY 10981 USA
Tel: +1 (845) 469-2285