

# SureLock<sup>®</sup> Rope Lock

- Will not open if the set is more than 50 lb (22.6 kg) out of balance, reducing the risk of rigging "runaways"
- Indicates if the set is balanced, batten heavy, or arbor heavy
- One piece ASTM A536 ductile iron body
- 10" (254 mm) handle, powder-coated ductile iron, contoured for comfort and ease of use
- Two iron cams grip rope with socket head adjustment screw for 5/8"-1" (15.875-25.4 mm) rope. Adjustment screw has a nylon tip for quiet operation.
- Integral ears for optional padlock
- Vinyl coated steel oval locking ring
- May be used on 6" (152 mm) centers or more
- For use in new projects or as an upgrade to existing rigging systems
- Rubber bumper to quiet handle when it is opened


**Please note:**

Rope locks are not designed to hold an imbalance of more than 50 lb (22.6 kg), nor to be used as a speed control.



SureLock  
010-600R  
US Patent 7,165,295

## Dimensions

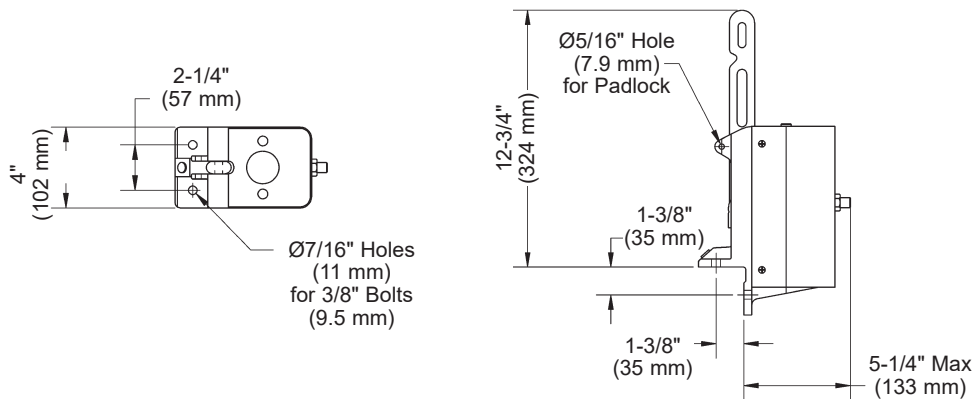

## Order Information

Number	Description	RWL	Weight
010-600R	SureLock	50 lb (22.6 kg)	20 lb (3.6 kg)
010-PLOCK	Padlock for Rope Lock	—	1 lb (0.45 kg)
110-533C	Replacement Oval Ring, Vinyl Coated	—	0.1 lb (0.04 kg)

**RWL:** RWL is maximum load that can be applied to the rope lock which is in "like new" condition and has been properly installed, maintained, and operated.

**MUSIC EDUCATION AND PERFORMING ARTS**

Owatonna Office: Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | wengercorp.com  
555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

Syracuse Office: Phone 800.836.1885 Worldwide +1.315.451.3440 | jrclancy.com | 7041 Interstate Island Road | Syracuse | NY 13209-9713

**ATHLETICS** Phone 800.493.6437 | email gearboss@wengercorp.com | gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448