



# Performance Controls

## LITErig™

### Features


- Modular System Components
- Easy, Quick-Release System
- Durable, Rugged Construction

Safety Cable Assembly  
Control Cable  
20a Power Cable

Unistrut nut  
Lock Nut  
1/4 turn Lock  
Handle  
Unistrut track

Illustration of a typical installation  
employing PAR fixtures

Hanger  
Aluminum Batten  
PAR light

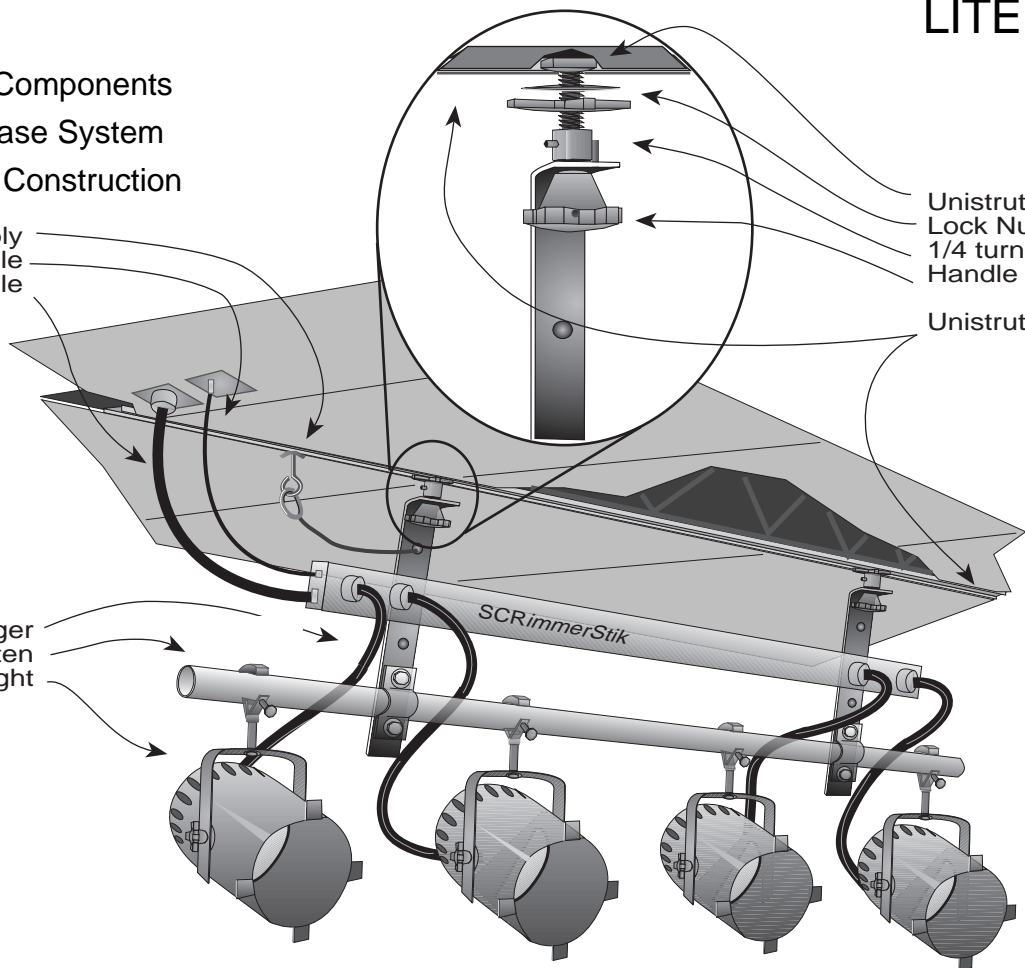

## Description

The LITErig™ has been developed to meet the needs of facilities like ballrooms, meeting rooms, banquet facilities; any area where the ability to install and remove lighting equipment quickly, with a minimum of time and effort is desirable.

The system is designed to efficiently hang a full lighting system in venues equipped with UniStrut™ channel track systems. Employing a unique quick-release mechanism, the hanger will carry 1.25", schedule 40 pipe batten, four lighting instruments, the SCRimmer Stik, and includes a safety cable assembly.

Built to demanding specifications and constructed of .125" strap steel, 1.5" wide, the hangers are rugged and strong. The cast iron and steel parts of the quick-set and release system called the Track Tamer™ is engineered to withstand long, hard use.

The Track Tamer™, with its' exclusive 1/4-turn lock, allows an entire assembly to be easily handled and installed or struck by one person. The entire unit, excluding the luminaires, weighs about eighteen pounds. This modular hanging system is a simple, neat, and very fast method of deploying and relocating a complete lighting system.

### Order Information:

#### LITErig™ System Components:

Track Tamer Hangers  
Safety Cable Assembly  
Aluminum Pipe Batten

SCRimmer Stik:  2x1200, circuits / watts  
 4x600, circuits / watts  
 PAR 56 Fixtures

#### Options:

Black  
 White  
 Custom Colors

## Electronics Diversified Inc.

PRODUCT DATA SHEET  
P156

1675 N.W. Cornelius Pass Road | Hillsboro, Oregon 97124 U.S.A.  
Phone: (503) 645-5533 | FAX: (503) 629-9877 | Web Site: www.edionline.com

**System Components:**


- a. Track Tamer™, Hanger assembly
- b. aluminum pipe batten
- c. SCRimmer Stik™
- d. safety cable assembly.

**Component General Characteristics:**

- a. Track Tamer™, Hanger assembly  
High strength cast iron handle. Steel screw. Welded Unistrut™ nut. .125" Strap steel, 3/8" Bolts and Nuts.
- b. 4' Aluminum pipe batten  
1.25" Diameter, .140" wall.

- c. SCRimmer Stik™  
Portable dimmer unit rated at 2400 watts total. Carries either four or two dimmers. Four dimmer units rated at 600 watts each dimmer, two at 1200 watts each. Remote and Local digital control. USITT DMX 512 protocol.
- d. Safety cable assembly  
Closed steel hook, 1/8" wire rope, 3/8" eye bolt.

Note: Shown below is a typical application for the LITErig™ including some commonly used luminaires. The entire unit, without the luminaires weighs 18.2 pounds. With the PAR 56 units, each at approximately nine pounds, the complete unit weighs less than 60 pounds.

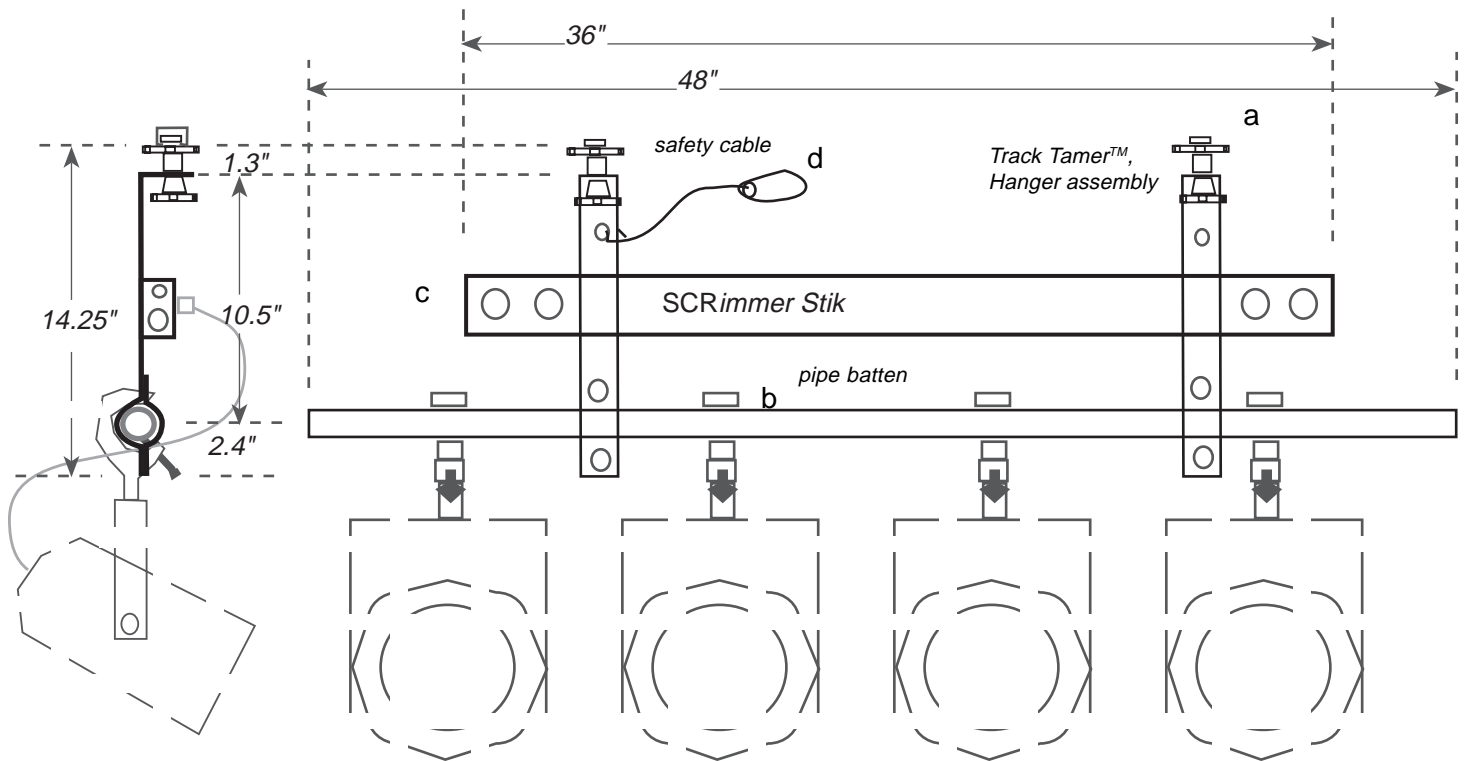

JOB NUMBER:

APPROVAL STAMP

JOB NAME:

CUSTOMER:

P. O. #



1675 N.W. Cornelius Pass Rd. Hillsboro, Oregon 97124 U.S.A. Phone 1-800-547-2690

Track Tamer™ Mfg. by ACT Enterprises Inc. Seattle, WA

PRODUCT DATA SHEET P156

Specifications subject to change without notice. Specification applicable to standard products only. © 1998 Electronics Diversified, Inc. All rights reserved. Printed in USA Patents Pending