




## Features

- Wall-mount Configuration
- Twelve 20 Amp, electrically isolated dry-contact closures
- Allows DMX control of non-SCR dimmer compatible machines and devices
- Status indicators
- Compatible with all standard USITT DMX-512 outputs
- Can "Daisy-Chain" between additional DMX compatible devices


## DMX Relay 20 Amp

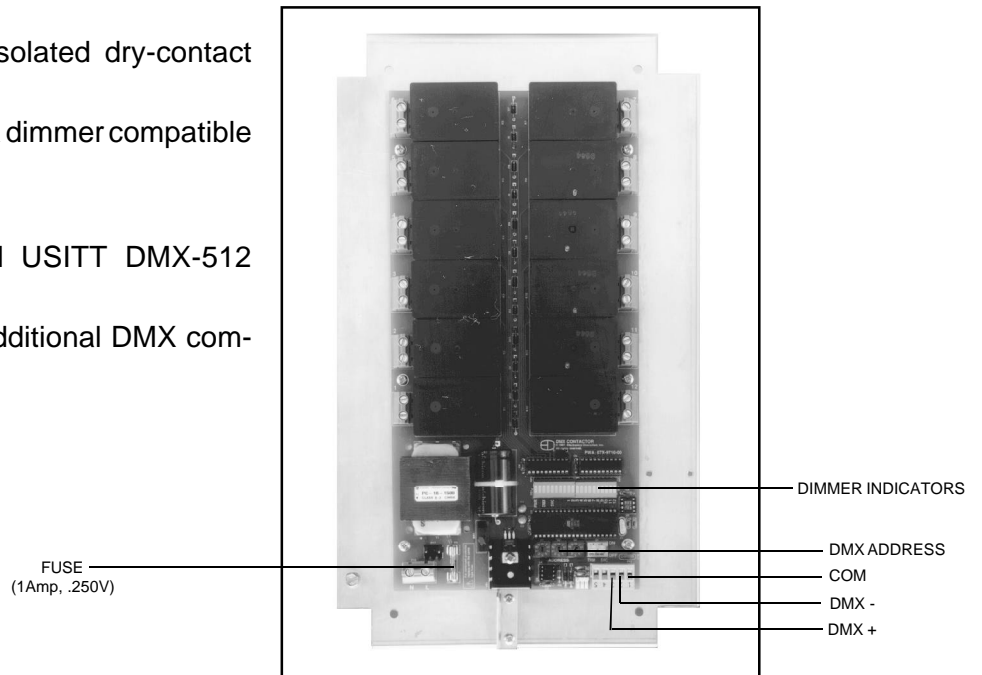

## General Information

1. Designed for Industrial applications and simplicity.
2. Controls twelve 20 Amp relays.
3. Input power is provided via 120 or 277 VAC, 50/60 Hz. Internal protection is provided. Power consumption is less than 1 amp.
4. All control electronics are contained on a double-sided, through-hole plated fiberglass circuit board.
5. DMX-Relays may be daisy-chained to additional DMX compatible devices.
6. Input and output is by terminal block connectors.

### Enclosure Dimensions:

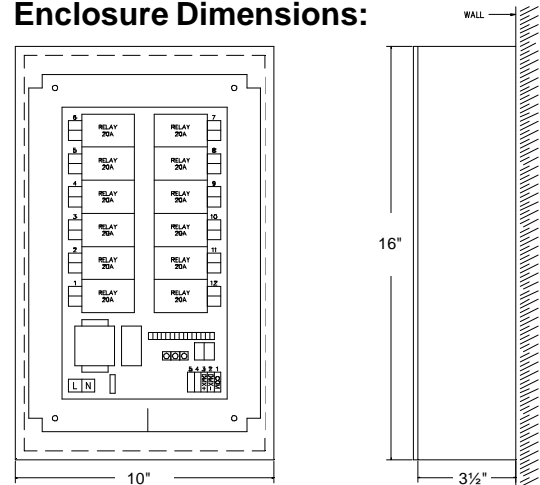

### Order Information:

#### DMX Relay Unit:

- Wall Mount

Specifications subject to change without notice. Specification applicable to standard products only.  
©1997 Electronics Diversified, Inc. All rights reserved. 0497

JOB NUMBER:

APPROVAL STAMP

JOB NAME:

CUSTOMER:

P. O. #

## Electronics Diversified, Inc.

PRODUCT DATA SHEET  
P505

1675 N.W. Cornelius Pass Road ● Hillsboro, Oregon 97124 U.S.A.

Phone: (503) 645-5533 ● FAX: (503) 629-9877 ● Web Site: www.EDIOOnline.com