

SPECTRA SERIES UV40 LED WASH

The Spectra Series UV40 is a 40 Watt UV luminaire utilizing high performance, long life UV-A emitters. The Spectra Series UV40 is designed with four independent LED cells on four independent DMX channels for intensity control.


An on board multi-voltage power supply allows for direct power and data connection as well as feed through capabilities. The Spectra Series UV40 is compatible with both DMX and RDM protocols and comes complete with a library of pre-programmed fades and strobos as well as manual intensity control.

Product Features:



- High performance, long life UV-A emitters
- Less visible light than traditional black lights using 365nm UV-A LEDs
- Individual focus of the UV cells
- Feed through power and data capabilities
- 10° or 30° lens options
- Selectable 8 and 16 bit personalities for smooth fades from 0 to 100%
- On-board multi-voltage power supply 100-240VAC, 50/60Hz.
- DMX and RDM compatible
- DMX address setting via on-board push button display or RDM
- Weight:
 - Power Supply Enclosure: 11.5 lbs. (5.2 kgs.)
 - LED Pod: 2.1 lbs (0.95 kg)
- cETLus listed for indoor use and CE marked
- Made in the USA
- Five (5) year and one (1) day warranty
- No cost technical support for the life of your product





UV40

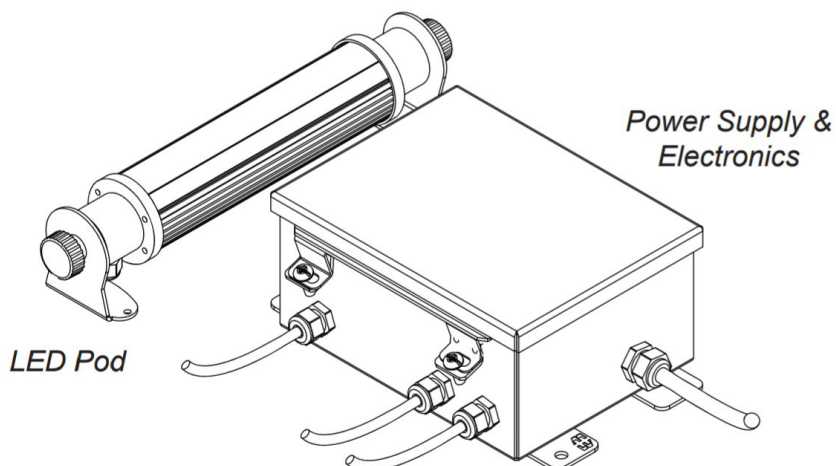

Dimensions

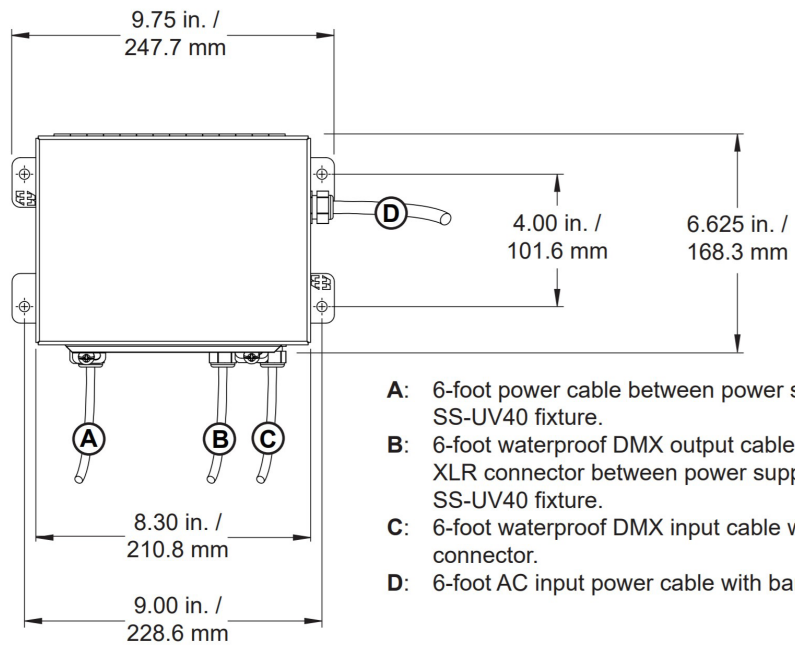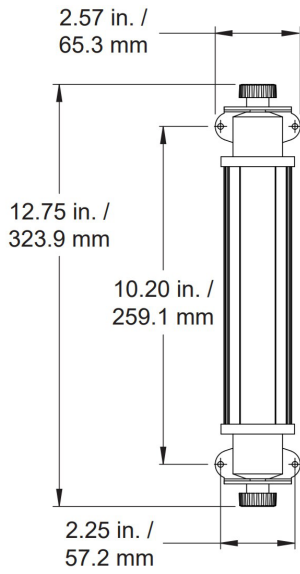

- A:** 6-foot power cable between power supply enclosure and SS-UV40 fixture.
- B:** 6-foot waterproof DMX output cable with 5-pin female XLR connector between power supply enclosure and SS-UV40 fixture.
- C:** 6-foot waterproof DMX input cable with 5-pin male XLR connector.
- D:** 6-foot AC input power cable with bare ends.

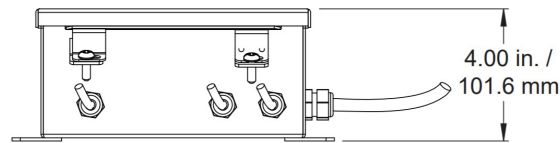

Specifications

Materials:	Corrosion-resistant materials and hardware
Control:	DMX (Fully RDM Compliant)
Light Engine	4 each long life, UV-A LED emitters (365 nm) per Pod (16 emitters maximum)
Rated LED Life:	Array rating >50,000 hours to L70
Beam Size	10° or 30° lens options
Power:	40 Watts maximum
Voltage:	120-240VAC
Cooling:	Passive, convection
Environment:	IP65
Color:	Black
Weight:	Power Supply Enclosure: 11.5 lbs. (5.2 kg) LED Pod: 2.1 lbs (0.95 kg)
Compliance:	cETLus listed, CE marked
Warranty:	Five (5) years and One (1) day
Support:	Supported Forever - free phone and online tech support for the life of your product.

Notes:

C-Clamps are not included with the fixture and must be ordered separately.

Ordering Information

SS-UV-40-10	SSUV40 Fixture With 10 Degree Lens, Black
SS-UV-40-30	SSUV40 Fixture With 30 Degree Lens, Black

Notes:

Lenses are not sold separately and are not changeable in the field

Optional Accessories

SS-UV10C-10	SS-UV LED 10-Watts, 10-Degrees IP65 Pod
SS-UV10C-30	SS-UV LED 10-Watts, 30-Degrees IP65 Pod
SS-UV10C-EXT-5	5-foot IP65 Extension Cable
SS-UV10C-EXT-10	10-foot IP65 Extension Cable
SS-UV10C-EXT-25	25-foot IP65 Extension Cable
SS-UV10C-EXT-50	50-foot IP65 Extension Cable
SS-UV40DB	UV40 IP65 Driver Box with four on 18-inch pigtails, 40W, Gray
SS-UV40DB-BK	UV40 IP65 Driver Box with four on 18-inch pigtails, 40W, Black
SS-UV10C-Y-2-B	UV10C 2-Gang Mounting Yoke-Black

Notes:

**Black (B) or White (W) or Custom (C). Consult factory for custom colors.